

LOCTITE®

nexa3D®

xPEEK147

HDT230

High Heat

Black

Nexa3D

1923 Eastman Ave, Suite 200
Ventura, CA 93003

12/14/2020

Preliminary v3.5

nexa3D®

xPEEK147 HDT230 High Heat

Description

xPEEK147 is a high temperature resistant resin with HDT 230°C for tooling and molding applications. The material showcases good dimensional stability, good surface finish and sufficient toughness to withstand mechanical stresses from molding processes. This material is resistant to temperature stress and is ideal for tooling applications.

Available Colors: Black, Natural

Mechanical Properties *	Method	Green	Post cured with Uvitron Intelliray 600 5min /per side
Tensile Stress at Break	ASTM D638	30.7 ± 1.6 MPa ^[3]	75 ± 2.0 MPa ^[5]
Young's Modulus	ASTM D638	1150 ± 137 MPa ^[3]	3192 ± 35 MPa ^[5]
Elongation at Failure	ASTM D638	5.9 ± 1.7 % ^[3]	3.0 ± 0.1 % ^[5]
Flexural Stress at Yield	ASTM D790	68 ± 3 MPa ^[12]	128± 17 MPa ^[1]
Flexural Modulus	ASTM D790	2053 ± 189 MPa ^[12]	3168± 33 MPa ^[1]
Flexural Strain at Break	ASTM D790	7.6 ± 2.7 % ^[12]	4.52± 0.8 % ^[1]
Thermal Properties			
HDT @ 0.455 MPa VICAT	ASTM D648	^[20]	238°C ^[19]
HDT @ 1.82 MPa VICAT	ASTM D648		107°C ^[23]
Coefficient of Thermal Expansion (25-200°C)	ASTM E831		114 µm/m-°C ^[17]
Other Properties			
Durometer (Shore D, 0 Sec)	ASTM D2240		94D ^[8]
IZOD Impact Strength	ASTM D256		14.6 J/m ^[13]
Water Absorption (24 Hr)	ASTM D570		0.25% ^[16]
Solid Density	ASTM D792	1.246 g/cm ³ ^[24]	1.262 g/cm ³ ^[24]
Shrinkage by Density	ASTM D792	8.25% ^[24]	9.64% ^[24]
Liquid Properties			
Viscosity @ 25°C (77°F)	ASTM D7867	2105 ± 200 cP ^[11]	
Liquid Density	ASTM D1475	1.15 g/mL ^[15]	

"All specimen are printed unless otherwise noted. All specimen were conditioned in ambient lab conditions at 19-23C / 40-60% RH for at least 24 hours." ASTM Methods: D638 Type IV, 5mm/min, D790-B, 2mm/min, D256 Notched IZOD (Machine Notched), 6 mm x 12 mm, D648, D2240, Type "D" (0, 3 seconds), D570 0.125" x 2" Disc 24hr@ 25°C, D7867@ 25°C (77°F), D1475

* The physical and mechanical properties are based on workflows developed at Nexa3D using Nexa3D printing, cleaning, and curing equipment. This information is representative only. Contact your Nexa3D Technical Service Team for further information.


- | | | | |
|---------------------------------|--------------------------------|--------------------------------|--------------------------------|
| 1. TaskID Reference: FOR2424542 | 8. TaskID Reference: FOR8160 | 15. TaskID Reference: FOR8163 | 22. TaskID Reference: FOR19477 |
| 2. TaskID Reference: FOR6308 | 9. TaskID Reference: FOR5454 | 16. TaskID Reference: FOR12288 | 23. TaskID Reference: FOR24545 |
| 3. TaskID Reference: FOR8167 | 10. TaskID Reference: FOR5646 | 17. TaskID Reference: FOR8169 | 24. TaskID Reference: FOR19479 |
| 4. TaskID Reference: FOR6307 | 11. TaskID Reference: FOR20535 | 18. TaskID Reference: FOR8168 | 25. TaskID Reference: FOR6491 |
| 5. TaskID Reference: FOR5687 | 12. TaskID Reference: FOR4007 | 19. TaskID Reference: FOR24543 | 26. TaskID Reference: FOR20374 |
| 6. TaskID Reference: FOR5769 | 13. TaskID Reference: FOR8157 | 20. TaskID Reference: FOR19475 | 27. TaskID Reference: FOR24356 |
| 7. TaskID Reference: FOR8159 | 14. TaskID Reference: FOR8158 | 21. TaskID Reference: FOR19476 | |

xPEEK147 HDT230 High Heat

Environmental Resistance **

Heat Aging

Aged at 125°C and tested @ 22°C ^[27]

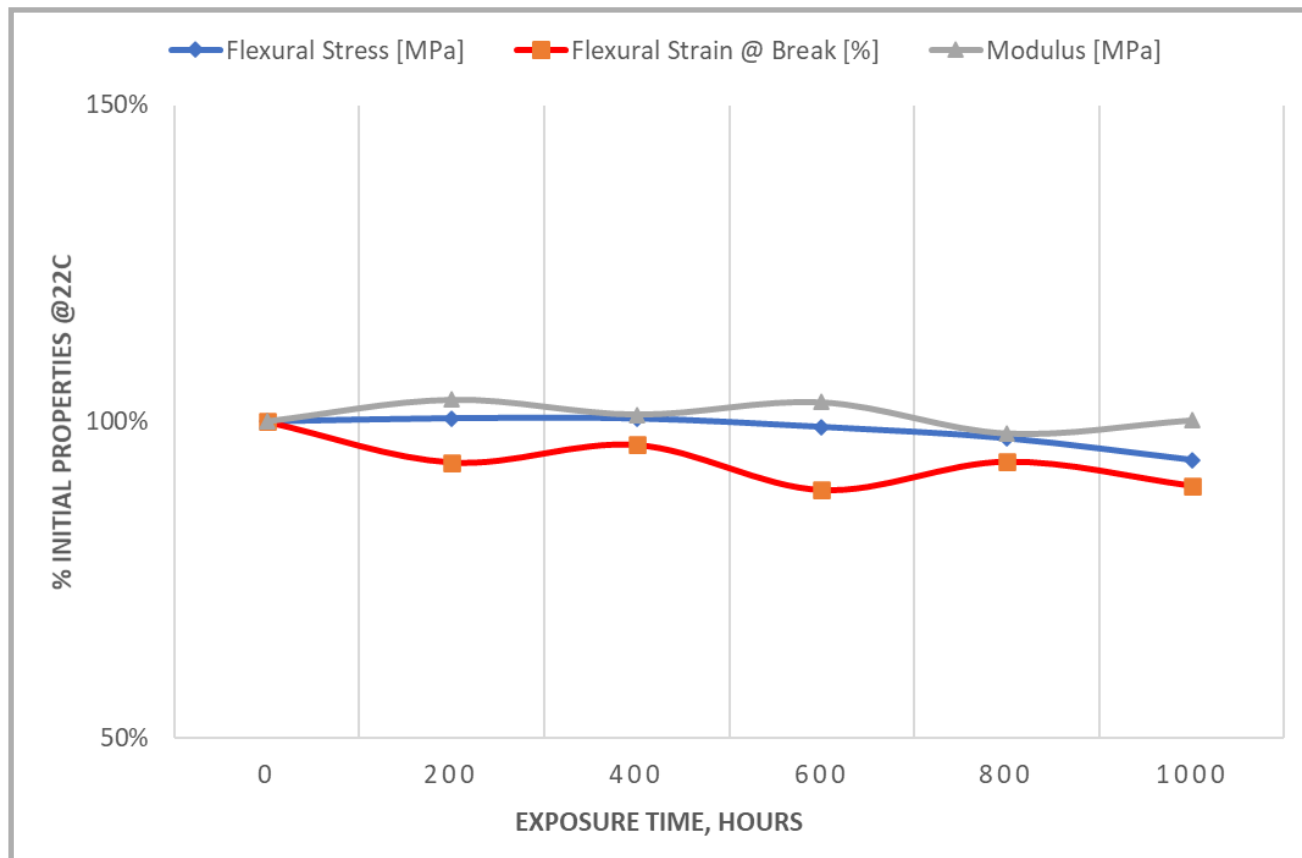

** Based on data provided by Henkel.

xPEEK147 HDT230 High Heat

Post Processing

xPEEK147 requires post processing to achieve specified properties. Prior to post curing, support structures should be removed from the printed part, and the part should be washed in a compatible cleaner. Nexa3D recommends either IPA or Nexa3D's xClean in 2 minute wash intervals. Use compressed air to remove residual solvent from the surface of the material between intervals. Exact times and methods can be found by contacting us at www.nexa3d.com.

Post Curing

xPEEK147 requires post curing to achieve specified properties. A wide array of post cure equipment can be used to cure appropriately. Detailed information can be found by contacting us at www.nexa3d.com.

Additional Development Options

Colors: xPEEK147 formula can be made in additional pigment colors. Formula Modification for xPEEK147 are possible.

xPEEK147 HDT230 High Heat

Note

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Nexa3D is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

The following Disclaimers may apply depending on country of delivery:

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law. In case Nexa3D would be nevertheless held liable, on whatever legal ground, Nexa3D's liability will in no event exceed the amount of the concerned delivery.

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, Nexa3D Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Nexa3D products. Nexa3D specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits. The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Nexa3D or Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of either Nexa3D or Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.